




SYMBOL CARD

description Environmentally-friendly ECF boards (SBS, GZ), certify FSC. Double blade coated on one side with a Satin finish. Available in Premium White colour.

range

size	grain	substance
72x102	LG	210 240 270 300 330 360

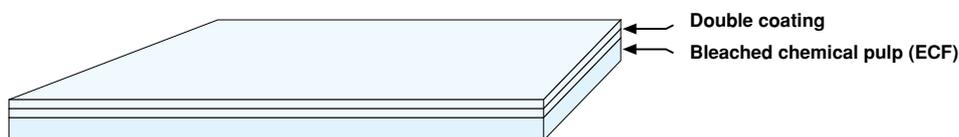

technical features
ref. standard/instrument
unit of measure

substance	thickness	roughness*	stiffness Taber 15°	
ISO 536	ISO 534	ISO 8791-2	ISO 2493	
g/m ²	µm	ml/min	mN	
			long±10%	cross±10%
210 ± 4%	250 ± 10	380 ± 20	80	53
240 ± 5%	285 ± 10	300 ± 20	125	78
270 ± 5%	325 ± 10	285 ± 20	190	115
300 ± 5%	360 ± 10	285 ± 20	233	150
330 ± 5%	400 ± 10	285 ± 20	315	195
360 ± 5%	437 ± 10	270 ± 20	400	250

Brightness - ISO 2470 (R457) - 104% ± 2
Relative Humidity 50% ± 5 ref. TAPPI 502-98
* Uncoated side

ecological features



The mark of responsible forestry

ELEMENTAL
CHLORINE
FREE
GUARANTEED



notes The product is completely bio-degradable and recyclable. Special runs available upon request.

The Company reserves the right to modify the technological features of the product in relation to market requirements.

Symbol Card is excellent for packaging, covers, postcards, brochures, promotional material, CD cases and similar applications.

applications

Can be used without problems with the main printing systems: letterpress, offset, blind embossing, hot foil stamping, thermography and screen-printing. For offset printing, the characteristics of the coated side are comparable to our Symbol Freelifa Satin, and the uncoated side is designed to provide good printability, also with solid colours.

printing
suggestions

Good results can be expected with all the main converting process: cutting, die-cutting, scoring, glueing, varnishing and plastic lamination.

converting
suggestions


S Y M B O L™